







SEE MORE GO FURTHER GO SAFER



WHY BUY PRODUCT...

LAZER IS RECOGNISED AS A GLOBAL LEADER IN THE DEVELOPMENT AND MANUFACTURE OF LIGHTING PRODUCTS FOR THE SECTORS WE SERVE. AS A UK **BASED MANUFACTURER WE WILL DELIVER UPON CUSTOMER EXPECTATIONS FOR** HIGH QUALITY AND HIGH INNOVATION LIGHTING SOLUTIONS.

Understanding the importance of being environmentally responsible while focusing on sustainability ensures that our customers can feel good about the Lazer products they purchase. Outstanding customer service is essential to building lasting relationships, and we strive to exceed expectations in every interaction. By prioritising product quality, we ensure our customers receive products that meet their needs and perform exceptionally. These core values reflect our commitment to meeting the needs of a global market.













REPRESENTING THE VERY BEST IN SLIMLINE AUXILIARY HIGH BEAM DRIVING LIGHTS AND EXCEPTIONAL VALUE FOR MONEY, THE LINEAR RANGE FEATURES A LOW-PROFILE DESIGN PERFECT FOR FACILITATING INSTALLATION WHERE SPACE MIGHT BE LIMITED OR WHEN LOOKING FOR A DISCREET INSTALLATION.


By combining highly-efficient 3W LEDs with ultra-reflective, vacuum-metallised reflectors, the Linear range delivers finely tuned light distribution, providing exceptional visibility, including at the sides of the road. Additionally, a comparatively lower up/down spread ensures the Linear is ideally suited for mounting towards ground level on a vehicle's front end.

FEATURES

LOW PROFILE CROSS SECTION
HIGH DENSITY 3W LED TECHNOLOGY
ECE APPROVED FOR ROAD USE
OPTIMISED FOR LOWER MOUNTING POSITIONS
5 YEAR WARRANTY
IP68 WATERTIGHT

| TECHNICAL SPECS | LINEAR-6 | LINEAR-12 | LINEAR-18 |
|-------------------------|----------|-----------|-----------|
| E-MARK REFERENCE | 12.5 | 27.5 | 30.0 |
| VOLTAGE RANGE | 10-32V | 10-32V | 10-32V |
| RAW LUMENS | 2,250 | 4,500 | 6,750 |
| BEAM PATTERN | WIDE | WIDE | WIDE |
| BEAM DISTANCE (0.25LX) | 494M | 698M | 855M |
| NO. HIGH POWER LEDS | 6 | 12 | 18 |
| POWER CONSUMPTION | 21W | 42W | 63W |
| CURRENT DRAW (AT 14.4V) | 1.5A | 2.9A | 4.4A |
| LED LIFE (HOURS) | 50,000* | 50,000* | 50,000* |
| WEIGHT | 495G | 800G | 1,090G |

*LED manufacturers specification








| DIMENSIONS | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | F (mm) |
|------------|--------|--------|--------|--------|--------|--------|
| LINEAR-6 | 232 | 62 | 40 | 41-54 | 58 | 77 |
| LINEAR-12 | 382 | 62 | 40 | 41-54 | 58 | 77 |
| LINEAR-18 | 532 | 62 | 40 | 41-54 | 58 | 77 |



LINEAR RANGE ISOLUX PERFORMANCE

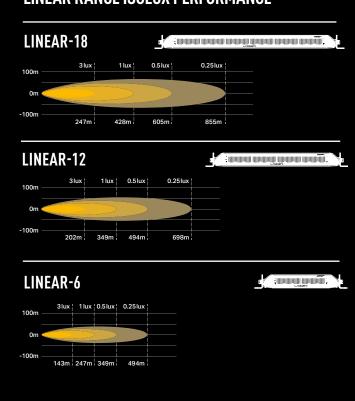

LINEAR LIGHT OUTPUT

LINEAR-12















THE LINEAR PRODUCTS, DESPITE THEIR DIMINUTIVE PROPORTIONS, COME PACKED WITH ADVANCED FEATURES FOR MARKET-LEADING PERFORMANCE AND LONGEVITY. ENGINEERED FOR DAY-TO-DAY ROOF MOUNTING AND OFF-ROAD USE, THE LINEAR-36, LINEAR-42, AND LINEAR-48 ARE IDEAL FOR THOSE SEEKING HIGH-QUALITY LED LIGHT BARS.


Rigorously tested at the pinnacle of professional motorsport, these lights seamlessly integrate with modern vehicles, providing understated style and unparalleled lighting performance. With a sleek, low-profile design, smooth lines, and contemporary features, experience the perfect blend of form and function with the Linear range of lights.

FEATURES

AERODYNAMIC DESIGN VIRTUALLY ELIMINATES WIND NOISE ECE CERTIFICATION (36 AND 42 MODELS)
CONTEMPORARY DESIGN FEATURES
COMPATIBLE ROOF MOUNTING KITS AVAILABLE
MINIMAL GLARE FROM ROOF INSTALLATIONS
ANTI-THEFT SECURITY FIXINGS

TECHNICAL SPECS LINEAR-36 LINEAR-42 LINEAR-48 F-MARK REFERENCE 50.0 50.0 N/A VOLTAGE RANGE 10-32V 10-32V 10-32V RAW LUMENS 13.500 15.750 18.000 WIDE WIDE BEAM PATTERN WIDE BEAM DISTANCE (0.25LX) 940M 984M 1,101M 42 NO. HIGH POWER LEDS 36 48 POWER CONSUMPTION 126W 147W 168W **CURRENT DRAW (AT 14.4V)** 8.8A 10.2A 11.7A LED LIFE (HOURS) 50.000° 50.000* 50.000* 3,500KG 4,000KG WEIGHT 2,700G

*LED manufacturers specification








| DIMENSIONS | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | F (mm) |
|------------|--------|--------|--------|--------|--------|--------|
| LINEAR-36 | 982 | 62 | 40 | 41-54 | 58 | 77 |
| LINEAR-42 | 1,132 | 62 | 40 | 41-54 | 58 | 77 |
| LINEAR-48 | 1,282 | 62 | 40 | 41-54 | 58 | 77 |



LINEAR RANGE ISOLUX PERFORMANCE

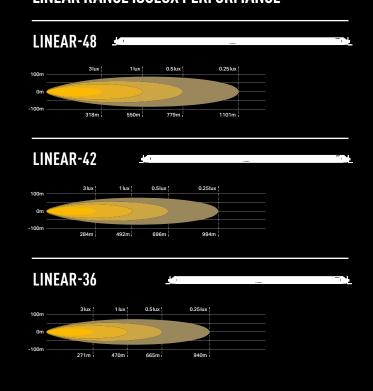







EXPERIENCE A NEW LEVEL OF LIGHTING PERFORMANCE WITH THE LINEAR ELITE RANGE. DEVELOPED WITH EFFORTLESS INTEGRATION IN MIND WITH A SLIMLINE, AERODYNAMIC DESIGN. DON'T BE FOOLED BY THE MODEST PROPORTIONS OF EACH LAMP, THEY PACK A POWERFUL PUNCH! SEEING IS BELIEVING!


Delivering expertly engineered light distribution for unmatched visibility with carefully calibrated intensity and spread illumination, you'll enjoy unrivalled clarity in any driving conditions. For added safety and style, you can opt for the Linear-12 Elite or Linear-18 Elite, which feature an integrated position light function. Choose Elite for even greater visibility and lighting performance, and drive with confidence.

FEATURES

UNRIVALLED LIGHTING PERFORMANCE
LOW PROFILE CROSS SECTION
ADVANCED LED TECHNOLOGY
ECE APPROVED FOR ROAD USE
AUTOMOTIVE GRADE CORROSION RESISTANCE
INTEGRATED POSITION LIGHT FUNCTION AVAILABLE (12 & 18 ONLY)

TECHNICAL SPECS LNR-6 ELITE LNR-12 ELITE **LNR-18 ELITE** E-MARK REFERENCE 17.5 37.5 45.0 **VOLTAGE RANGE** 10-32V 10-32V 10-32V RAWIUMENS 4.050 8.100 12.150 WIDE WIDE WIDE **REAM PATTERN** BEAM DISTANCE (0.25LX) 563M 796M 975M 12 24 NO. HIGH POWER LEDS 36 POWER CONSUMPTION 42W 84W 126W CURRENT DRAW (AT 14.4V) 5.8A 8.8A 2.9A LED LIFE (HOURS) 50,000* 50,000* 50,000* WEIGHT 800G 1,090G

*LED manufacturers specification








| DIMENSIONS | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | F (mm) |
|-----------------|--------|--------|--------|--------|--------|--------|
| LINEAR-6 ELITE | 232 | 62 | 40 | 41-54 | 58 | 77 |
| LINEAR-12 ELITE | 382 | 62 | 40 | 41-54 | 58 | 77 |
| LINEAR-18 ELITE | 532 | 62 | 40 | 41-54 | 58 | 77 |



LINEAR RANGE ISOLUX PERFORMANCE

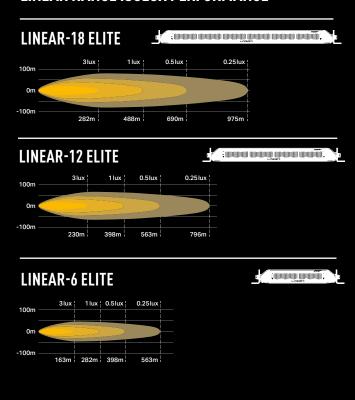

LINEAR ELITE LIGHT OUTPUT

LINEAR-18 ELITE


















BOASTING OVER TWICE THE LIGHT OUTPUT COMPARED TO STANDARD VERSIONS, THE 'BIG' LINEAR-36/42/48 ELITE DELIVER UNBELIEVABLE LIGHTING PERFORMANCE WHEN OFF-ROAD DRIVING. THEIR VERSATILE DESIGN MAKES THEM SUITABLE FOR VARIOUS MOUNTING OPTIONS, AND THEIR SLEEK, AERODYNAMIC ALUMINIUM HOUSING ELIMINATES WIND NOISE, PROVIDING A QUIET AND COMFORTABLE RIDE.


With its advanced features, superior performance, and innovative design, the Linear Elite range features an optical design optimised to provide a combination of long-distance illumination and wide-angle lighting, for a safer, more enjoyable night driving experience. The Linear Elite range is the perfect choice for those who demand the best lighting technology, in an understated but sleek and elegant product design.


FEATURES

COMBINATION SPOT AND WIDE ANGLE OPTICS 'UNBREAKABLE' POLYCARBONATE LENS OPTIMISED FOR ROOF MOUNTING HIGHLY EFFICIENT 3W 'PREMIUM BIN' LEDS LOW-PROFILE DESIGN FOR EASY INSTALLATION SUPPLIED WITH WIRING KIT

LINEAR RANGE ISOLUX PERFORMANCE

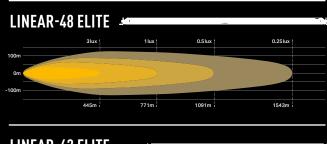

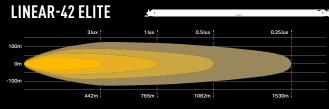

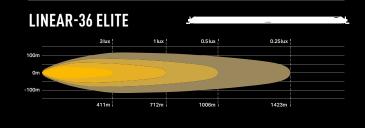

| TECHNICAL SPECS | LNR-36 ELITE | LNR-42 ELITE | LNR-48 ELITE |
|-------------------------|--------------|--------------|--------------|
| E-MARK REFERENCE | N/A | N/A | N/A |
| VOLTAGE RANGE | 10-32V | 10-32V | 10-32V |
| RAW LUMENS | 29,700 | 33,300 | 34,800 |
| BEAM PATTERN | WIDE | WIDE | WIDE |
| BEAM DISTANCE (0.25LX) | 1,423M | 1,530M | 1,543M |
| NO. HIGH POWER LEDS | 72 | 84 | 96 |
| POWER CONSUMPTION | 308W | 355W | 364W |
| CURRENT DRAW (AT 14.4V) | 21.4A | 24.7A | 25.3A |
| LED LIFE (HOURS) | 50,000* | 50,000* | 50,000* |
| WEIGHT | 2.7KG | 3.5KG | 4.0KG |

*LED manufacturers specification








| DIMENSIONS | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | F (mm) |
|-----------------|--------|--------|--------|--------|--------|--------|
| LINEAR-36 ELITE | 982 | 62 | 40 | 41-54 | 58 | 77 |
| LINEAR-42 ELITE | 1,132 | 62 | 40 | 41-54 | 58 | 77 |
| LINEAR-48 ELITE | 1,282 | 62 | 40 | 41-54 | 58 | 77 |

LINEAR ELITE LIGHT OUTPUT

LINEAR-48 ELITE

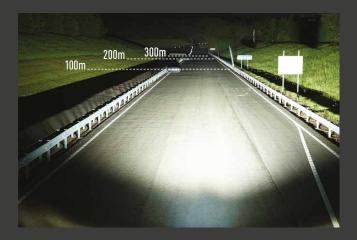









LAZER i-LBA



LINEAR-18 ELITE AND TRIPLE-R 1000/1250 ELITE PRODUCTS NOW OFFER A WORLD-FIRST; I-LBA, WHICH UTILISES TECHNOLOGY THAT REDEFINES THE PERFORMANCE AND FUNCTIONALITY OF AUXILIARY LED DRIVING LIGHTS. THIS INNOVATIVE FEATURE SETS OUR PRODUCTS APART FROM THE COMPETITION AND OFFERS DRIVERS UNPARALLELED LIGHTING CONTROL AND SAFETY.

The latest high-efficiency LEDs deliver a finely tuned beam pattern optimised for road use. Through the adoption of photoelectric sensors embedded within the driving light, when switching off the high beam, the lamp enters a Low Beam Assist mode, which maintains additional levels of illumination in zones where there are confirmed no oncoming vehicles or obstacles.

FEATURES

COMBINATION HIGH-EFFICIENCY LEDS
FINELY TUNED BEAM PATTERN
PHOTOELECTRIC SENSORS DETECT ONCOMING TRAFFIC
PATENT-PENDING TECHNOLOGY
ECE APPROVED FOR ROAD USE
5 YEAR WARRANTY

| TECHNICAL SPECS | LINEAR-18 ELITE i-LBA | TRIPLE-R 1000 ELITE i-LBA | TRIPLE-R 1250 ELITE i-LBA |
|-------------------------|--------------------------|------------------------------|------------------------------|
| E-MARK REFERENCE | 17.5 | 30.0 | 40.0 |
| VOLTAGE RANGE | 10-32V | 10-32V | 10-32V |
| RAW LUMENS | 18,000 / 5,538 | 11,068 / 3,423 | 16,136 / 4,602 |
| BEAM PATTERN | WIDE | WIDE | WIDE |
| BEAM DISTANCE (0.25LX) | 1,043 / 571M | 1,362 / 746M | 1,652 / 905M |
| NO. HIGH POWER LEDS | 48 | 26 | 36 |
| POWER CONSUMPTION | 135 / 43W | 95 / 32W | 151/35W |
| CURRENT DRAW (AT 14.4V) | 10.4/3.2A | 6.6 / 2.3A | 10.5 / 1.7A |
| LED LIFE (HOURS) | 50,000* | 50,000* | 50,000* |
| WEIGHT | 1,090G | 1,700G | 2,400G |

*LED manufacturers specification

DIMENSIONS LINEAR-18 ELITE i-LBA SEE LINEAR-18 ELITE - PAGE 6 TRIPLE-R 1000 ELITE i-LBA SEE TRIPLE-R 1000 ELITE - PAGE 14 TRIPLE-R 1250 ELITE i-LBA SEE TRIPLE-R 1250 SMARTVIEW - PAGE 18



INTELLIGENT LOW BEAM ASSIST FUNCTIONALITY





LOW BEAM MODE

The vehicle is driving along with the standard low beam driving lights on.





The vehicle high beams are activated simultaneously the Lazer Lamps' high beam function turns on, for a safer, more enjoyable night drive experience.





A vehicle comes from the opposite direction. The high beams deactivate. The Lazer Lamps' product retains additional lighting at the side of the road.





ASSIST MODE

Photoelectric sensors inside the light detect the car position and isolate zones of lighting to avoid dazzling, before

reactivating once the vehicle passes.









11





THE ICONIC TRIPLE-R RANGE OF AUXILIARY LED LIGHTS HAS SET THE STANDARD FOR THE PROFESSIONAL MOTORSPORT MARKET. THE LATEST UPGRADE DELIVERS EVEN MORE UNBEATABLE PERFORMANCE AND INNOVATION, SOLIDIFYING THE TRIPLE-R'S POSITION AS THE ULTIMATE CHOICE FOR DISCERNING DRIVERS.

The Triple-R range has a modern design with an increased light output, ideal for both on-road and off-road applications. It maintains a long-range 'spot' beam pattern while delivering a wider light spread. With white/amber position light options and outstanding high-beam performance, it is the best choice for those who demand high-quality auxiliary LED driving lights.


FEATURES

CONTEMPORARY DESIGN
DUAL OUTPUT E-BOOST TECHNOLOGY (ECE APPROVED)
5 YEAR WARRANTY
DESIGNED & MANUFACTURED IN THE UK
INCLUDES VERSATILE 'CENTRE MOUNT' MOUNTING SYSTEM

OPTIONAL WHITE/AMBER POSITION LIGHT

| TECHNICAL SPECS | RRR 750 | RRR 850 | RRR 1000** | RRR 1250 |
|-------------------------|---------|---------|-------------------|-------------------|
| E-MARK REFERENCE | 35.0 | 45.0 | 12.5 [†] | 20.0 [†] |
| VOLTAGE RANGE | 10-32V | 10-32V | 10-32V | 10-32V |
| RAW LUMENS | 4,620 | 6,930 | 9,240 / 1,848 | 13,860 / 2,772 |
| BEAM PATTERN | SPOT | SPOT | SPOT | SPOT |
| BEAM DISTANCE (0.25LX) | 866M | 1,061M | 1,225 / 548M | 1,500 / 671M |
| NO. HIGH POWER LEDS | 4 | 6 | 8 | 12 |
| POWER CONSUMPTION | 44W | 66W | 88 / 17.6W | 125 / 25W |
| CURRENT DRAW (AT 14.4V) | 3.1A | 4.6A | 6.1 / 1.2A | 8.7 / 1.7A |
| LED LIFE (HOURS) | 50,000* | 50,000* | 50,000* | 50,000* |
| WEIGHT | 1,000G | 1,340G | 1,700G | 2,400G |

†E-Mark compliant mode only *LED manufacturers specification **Also applies to Triple-R 1000 Beacon










| DIMENSIONS | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) |
|---------------|--------|--------|--------|--------|--------|
| TRIPLE-R 750 | 230 | 105 | 73 | 103 | 73-103 |
| TRIPLE-R 850 | 322 | 105 | 73 | 103 | 73-103 |
| TRIPLE-R 1000 | 400 | 105 | 73 | 103 | 73-103 |
| TRIPLE-R 1250 | 590 | 105 | 73 | 103 | 73-103 |

TRIPLE-R RANGE ISOLUX PERFORMANCE

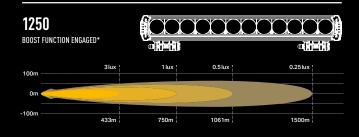


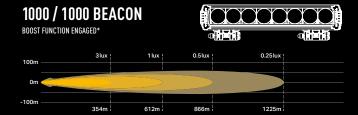

The iconic Triple-R 1000 is now offered with integrated amber **flashing beacon function**. Incorporating 16 forward-facing flash patterns, the additional safety functionality within the lamp, combines with the possibility to connect a white or amber position/side light function, as well as the exceptional high beam driving light function.

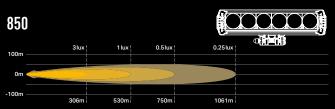

Applies to both standard and position light variants

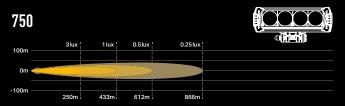

Applies to both standard and position light variant

TRIPLE-R LIGHT OUTPUT

TRIPLE-R 1000 - BOOST MODE















FOR THE ULTIMATE IN ROAD LIGHTING SOLUTIONS, THE FRESHLY REVAMPED TRIPLE-R ELITE RANGE UTILISES A COMBINATION OF HIGHER-INTENSITY LEDS TO DELIVER EXCEPTIONAL DISTANCE ILLUMINATION BUT WITH SUPERIOR AMOUNTS OF LIGHT AT THE SIDES OF THE ROAD.

The Triple-R Elite series offers breathtaking illumination capabilities while utilising Lazer's E-Boost dual output technology. For use in either E-Boost or E-Mark Compliant mode, offering maximum versatility. All Lazer's products, including the Triple-R Elite range, are engineered and constructed in the UK with a steadfast dedication to delivering outstanding performance and superior craftsmanship.

FEATURES

CLASS-LEADING PERFORMANCE
5 YEAR WARRANTY
HIGH INTENSITY LEDS 11W FOR DISTANCE
ADDITIONAL 3.5W LEDS FOR OUSTANDING MID-RANGE SPREAD
FULLY ECE APPROVED FOR ROAD USE
IP68 WATERPROOF

| TECHNICAL SPECS | 750 ELITE | 850 ELITE | 1000 ELITE |
|-------------------------|-------------------|-------------------|----------------|
| E-MARK REFERENCE | 12.5 [†] | 17.5 [†] | 25.0† |
| VOLTAGE RANGE | 10-32V | 10-32V | 10-32V |
| RAW LUMENS | 5,068 / 1,267 | 8,068 / 2,017 | 10,136 / 2,534 |
| BEAM PATTERN | DRIVE | DRIVE | DRIVE |
| BEAM DISTANCE (0.25LX) | 1,033 / 462M | 1,162 / 520M | 1,358 / 607M |
| NO. HIGH POWER LEDS | 4 | 6 | 8 |
| POWER CONSUMPTION | 46 / 11.5W | 73 / 18.25W | 104/23W |
| CURRENT DRAW (AT 14.4V) | 3.2 / 0.8A | 5.1 / 1.3A | 7.2 / 1.6A |
| LED LIFE (HOURS) | 50,000* | 50,000* | 50,000* |
| WEIGHT | 1,000G | 1,340G | 1,700G |

†E-Mark compliant mode only *LED manufacturers specification








| DIMENSIONS | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) |
|---------------------|--------|--------|--------|--------|--------|
| TRIPLE-R 750 ELITE | 230 | 105 | 73 | 103 | 73-103 |
| TRIPLE-R 850 ELITE | 322 | 105 | 73 | 103 | 73-103 |
| TRIPLE-R 1000 ELITE | 410 | 105 | 73 | 103 | 73-103 |


TRIPLE-R ELITE ISOLUX PERFORMANCE

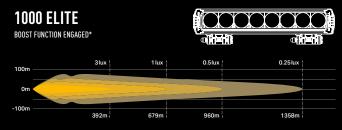

*Boost function is engaged when the supplied boost cap is fitted to the lamp, when the vehicle is off-road

E-MARK COMPLIANT MODE




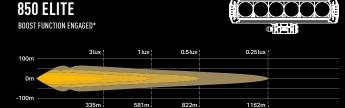

*Boost function is angaged when the supplied boost can is fitted to the lamp, when the vehicle is off-road







 * Boost function is engaged when the supplied **boost cap** is fitted to the lamp, when the vehicle is **off-road**

TRIPLE-R ELITE LIGHT OUTPUT

TRIPLE-R 1000 ELITE - BOOST MODE

















THE TRIPLE-R 16/24/28 ELITE SERIES REPRESENTS THE PINNACLE OF OFF-ROAD LIGHTING. AVAILABLE IN LENGTHS UP TO 52 INCHES, IT BOASTS SHARED DNA WITH LIGHTING SOLUTIONS USED IN THE HIGHEST LEVELS OF PROFESSIONAL MOTORSPORTS.


Upgrade your off-road experience with the Triple-R line of light bars. Elevated to Elite level performance in 2020/21, they deliver outstanding illumination in a spot beam pattern with a 30-degree spread to the left and right, leaving nothing in the dark. Through computer-aided design, the newly optimised lamp housing offers a reduction in wind noise when mounted on a roof.

FEATURES

HIGHLY EFFICIENT LED TECHNOLOGIES
SUPERIOR RANGE WITH LEFT/RIGHT SPREAD
5 YEAR WARRANTY
LOW WIND NOISE
ELECTRONIC THERMAL MANAGEMENT
'UNBREAKABLE' POLYCARBONATE LENS


TECHNICAL SPECS 24 ELITE 28 ELITE E-MARK REFERENCE N/A N/A **VOLTAGE RANGE** 10-32V 10-32V 10-32V RAW LUMENS 18.040 27.060 28.560 DRIVE DRIVE DRIVE REAM PATTERN BEAM DISTANCE (0.25LX) 1.920M 2.352M 2.506M NO. HIGH POWER LEDS 16 24 28 312W POWER CONSUMPTION 208W 326W CURRENT DRAW (AT 14.4V) 14.4A 21.7A 22.6A LED LIFE (HOURS) 50,000* 50,000* 50,000 WEIGHT 2,840G 4,780G

*LED manufacturers specification



| DIMENSIONS | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) |
|-------------------|--------|--------|--------|--------|--------|
| TRIPLE-R 16 ELITE | 765 | 105 | 73 | 103 | 73-103 |
| TRIPLE-R 24 ELITE | 1,125 | 105 | 73 | 103 | 73-103 |
| TRIPLE-R 28 ELITE | 1,305 | 105 | 73 | 103 | 73-103 |

TRIPLE-R ELITE ISOLUX PERFORMANCE

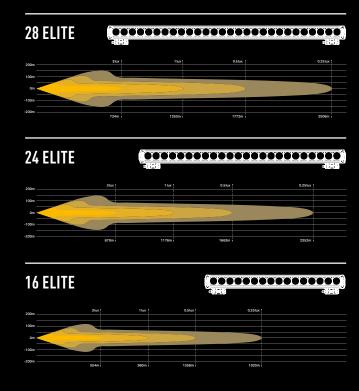

TRIPLE-R ELITE LIGHT OUTPUT TRIPLE-R 24 ELITE

100m 200m







TRIPLE-R SMARTVIEW



THE TRIPLE-R SMARTVIEW IS THE PINNACLE OF AUTOMOTIVE LIGHTING TECHNOLOGY. BOASTING INNOVATIVE FUNCTIONALITY THAT PROVIDES FOR ENHANCED SAFETY, COUPLED WITH LIGHTING PERFORMANCE AT THE PEAK OF LED TECHNOLOGY.

The Smartview connects effortlessly to your vehicle's electrical system with its 'Plug & Play' connectivity. The pre-programmed Anti-Theft Unit prevents the use of the lamp if removed from your vehicle. The 'Dashboard Controller' is a touch-screen device that lets you switch between five lighting modes, each with specific benefits for on-road and off-road situations. The lighting system delivers exceptional performance, making it stand out from others in the market.

FEATURES

DASHBOARD CONTROLLER ENABLES 5 X MULTI-FUNCTION MODES

PLUG & PLAY WIRING

ANTI-THEFT MODULE

5 YEAR WARRANTY

FULLY ECE APPROVED FOR ROAD USE

INCLUDES SIDE & CENTRE MOUNT KIT



TECHNICAL SPECS - SMARTVIEW 1250 E-BOOST 1250 E-MARK E-MARK REFERENCE N/A 45.0 **VOLTAGE RANGE** 10-32V 10-32V RAW LUMENS 12,170 8.550 COMBO COMBO REAM PATTERN BEAM DISTANCE (0.25LX) 1.463M 930M NO. HIGH POWER LEDS 12 12 POWER CONSUMPTION 105W 88W **CURRENT DRAW (AT 14.4V)** 6.1A 7.3A LED LIFE (HOURS) 50,000* 50.000 WEIGHT 1,940G

*LED manufacturers specification







DIMENSIONS A (mm) B (mm) C (mm) D (mm) E (mm) TRIPLE-R 1250 SMARTVIEW 590 105 73 103 73-103



TRIPLE-R 1250 SMARTVIEW FUNCTIONALITY







Enables the customer to operate the lamp in compliance with EU road-legal regulations.





Increases the intensity of light for maximum visibility. Off road use only.



NEAR-VIEW MODE

Provides superior levels of short-range illumination, ideal in more extreme weather conditions such as fog and snow.



DYNAMIC DIP

Delivers a smoother transition between high and low beam allowing time for the driver's eyes to adjust.



SPEED ADAPT MODE*

Beam pattern adjusts depending on the speed of the vehicle between 30mph-50mph (50kph-80kph).

*Speed Adapt only possible with Lazer CANM8 Duo Interface (sold separately).









19





THE SENTINEL RANGE OF ROUND LED DRIVING LIGHTS HAS BEEN EXPANDED TO INCLUDE 7-INCH VERSIONS, IN BOTH STANDARD AND ELITE GRADES. BLACK PRINTED CIRCUIT BOARDS CONTRIBUTE TO THE SLEEK DESIGN, WHILE THE **BLACK BEZEL WITH ITS INTRICATE HEXAGONAL PATTERN** PROVIDES A UNIQUE. MODERN LOOK.


The Sentinel 7-inch lamp exceeds expectations with its size and power rating, outpacing bigger, more powerful products. With an authentic 'combo' beam pattern, the central rows of LEDs and optics provide brilliant long-range illumination. The expertly crafted upper and lower sections of the Elite grade deliver a remarkable 65 degrees of enviable wide light spread.

FEATURES

SUPPLIED WITH 'SLIM' DIECAST ALUMINIUM MOUNTING BRACKET ULTRA-REFLECTIVE VACUUM-METALLISED SPOT AND WIDE OPTICS STEALTH BLACK APPEARANCE 'UNBREAKABLE' POLYCARBONATE LENS COMBINATION OF 24 PREMIUM 'BIN' LEDS SAFER NIGHT DRIVING WITH 5000K LED COLOUR TEMPERATURE

| TECHNICAL SPECS – SENTINEL 7" | 7" STANDARD | 7" ELITE |
|-------------------------------|---------------|----------------|
| E-MARK REFERENCE | 12.5 | 12.5 |
| VOLTAGE RANGE | 10-32V | 10-32V |
| RAW LUMENS | 5,208 / 1,041 | 10,248 / 2,049 |
| BEAM PATTERN | SPOT/WIDE | SPOT / WIDE |
| BEAM DISTANCE (0.25LX) | 1,217M | 1,233M |
| NO. HIGH POWER LEDS | 12 | 24 |
| POWER CONSUMPTION | 60 / 12W | 116/23W |
| CURRENT DRAW (AT 14.4V) | 4.3 / 0.9A | 7.6 / 1.5A |
| LED LIFE (HOURS) | 50,000* | 50,000* |
| WEIGHT | 1,500G | 1,500G |


*LED manufacturers specification



DIMENSIONS

TITANIUI

SENTINEL ISOLUX PERFORMANCE

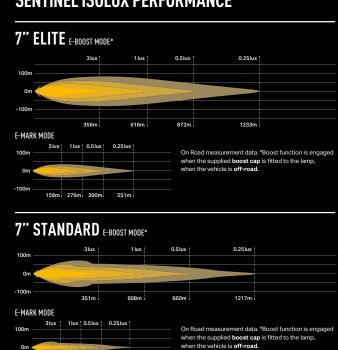

SENTINEL 7" LIGHT OUTPUT SENTINEL 7" ELITE-BOOST MODE















WITH A FOCUS ON QUALITY, SENTINEL LED SPOTLIGHTS COMBINE THE BEST AND LATEST ELECTRONICS AND MATERIAL DESIGN TO DELIVER UNRIVALLED LIGHTING PERFORMANCE WITH CUTTING-EDGE CONTEMPORARY PRODUCT DESIGN.


Available in two versions: Standard and Elite. The Standard version is available in black or chrome finishes, while the Elite version is only available in black. Both versions feature a wide beam pattern, maximising visibility in all conditions. Standard lights feature optional white or amber integrated position light function, making them attractive for light commercials and heavy trucks looking to impress. The Elite version and corresponding non-chrome Standard lights deliver a 'stealth' look, guaranteed to turn heads.

FEATURES


STANDARD AND ELITE GRADES AVAILABLE
WIDE BEAM PATTERN (52° HORIZONTAL SPREAD)
DUAL OUTPUT E-BOOST TECHNOLOGY (ECE APPROVED)
OPTIONAL WHITE / AMBER POSITION LIGHT
5 YEAR WARRANTY
'UNBREAKABLE' POLYCARBONATE LENS

TECHNICAL SPECS - SENTINEL 9" 9" STANDARD 9" ELITE E-MARK REFERENCE 20.0 20.0 **VOLTAGE RANGE** 10-32V 10-32V RAW LUMENS 9.520 / 1.904 15.232 / 3.046 REAM PATTERN WIDE / DRIVE WIDE / DRIVE BEAM DISTANCE (0.25LX) 1,414M 1.483M NO. HIGH POWER LEDS 20 32 POWER CONSUMPTION 87 / 17W 145 / 29W **CURRENT DRAW (AT 14.4V)** 6.0 / 1.2A 10.1/2.0A LED LIFE (HOURS) 50,000* 50,000* WEIGHT 2,500G 2,500G

*LED manufacturers specification

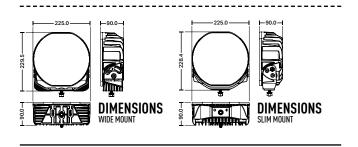

SENTINEL ISOLUX PERFORMANCE

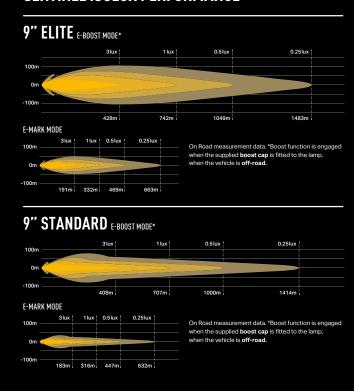

SENTINEL 9" LIGHT OUTPUT

SENTINEL 9" ELITE - BOOST MODE















THE SECOND GENERATION OF LAZER ST EVOLUTION LAMPS FEATURES STATE-OF-THE-ART LED TECHNOLOGY AND ELECTRICAL DESIGN; HOUSED IN A SLEEK, PRECISELY ENGINEERED ALUMINIUM ENCLOSURE, MAKING THE ST RANGE ESPECIALLY WELL-SUITED TO RURAL AND OFF-ROAD APPLICATIONS.

Throughout this new generation, there is improvement in light output with extended range and coverage. Compliant with road regulations and boasts category-leading low reference numbers, despite its exceptional performance. The ST Evolution range enhances the look of today's vehicles with its seamless and contemporary design.


FEATURES


SEAMLESS, LOW-PROFILE DESIGN ECE APPROVED HIGH OUTPUT (PREMIUM BIN) 11W LEDS 'DRIVE' BEAM PATTERN

INCLUDES VERSATILE 'CENTRE MOUNT' MOUNTING SYSTEM 'UNBREAKABLE' POLYCARBONATE LENS

| TECHNICAL SPECS | ST2 | ST4 | ST6 | ST8 | ST12 |
|-------------------------|---------|---------|---------|---------|---------|
| E-MARK REFERENCE | 7.5 | 10.0 | 10.0 | 17.5 | 25.0 |
| VOLTAGE RANGE | 10-32V | 10-32V | 10-32V | 10-32V | 10-32V |
| RAW LUMENS | 2,068 | 4,136 | 6,204 | 8,272 | 12,408 |
| BEAM PATTERN | DRIVE | DRIVE | DRIVE | DRIVE | DRIVE |
| BEAM DISTANCE (0.25LX) | 393M | 555M | 680M | 786M | 962M |
| NO. HIGH POWER LEDS | 2 | 4 | 6 | 8 | 12 |
| POWER CONSUMPTION | 23W | 47W | 70W | 95W | 144W |
| CURRENT DRAW (AT 14.4V) | 1.6A | 3.3A | 4.9A | 6.6A | 10.0A |
| LED LIFE (HOURS) | 50,000* | 50,000* | 50,000* | 50,000* | 50,000* |
| WEIGHT | 430G | 670G | 912G | 1,150G | 1,634G |


*LED manufacturers specification







| DIMENSIONS | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) |
|------------|--------|--------|--------|--------|--------|
| ST2 | 124 | 68 | 64 | 94 | 70-83 |
| ST4 | 204 | 68 | 64 | 94 | 70-83 |
| ST6 | 284 | 68 | 64 | 94 | 70-83 |
| ST8 | 364 | 68 | 64 | 94 | 70-83 |
| ST12 | 524 | 68 | 64 | 94 | 70-83 |

ST EVOLUTION RANGE ISOLUX PERFORMANCE

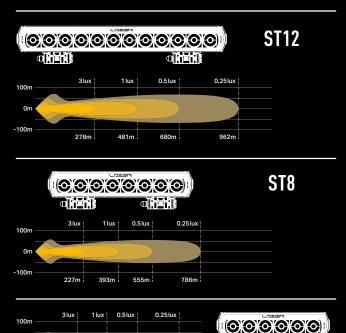

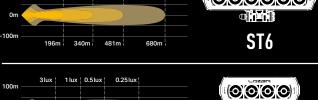







ST2

ST EVOLUTION LIGHT OUTPUT ST-8 EVO

100m....300m...













THE T-EVOLUTION LAMPS, EQUIPPED WITH 11W HIGH-**OUTPUT LEDS, PROVIDE SUPERIOR ILLUMINATION LEVELS** FOR OFF-ROAD ADVENTURES. THE T-EVOLUTION RANGE ENSURES THAT EVERY DETAIL IS VISIBLE, EVEN IN THE MOST CHALLENGING ENVIRONMENTS, THANKS TO THEIR **EXTENSIVE COVERAGE AND BRIGHTNESS.**

Engineered to conquer any terrain, the T-Evolution range of lamps features an 'unbreakable' polycarbonate lens which comes with a lifetime guarantee. Tested to IP69k standards to resist water and dust, ensuring these lamps will endure the toughest of conditions while delivering exceptional lighting performance optimised for off-road use, year after year, without losing their shine, all backed by a 5-year warranty.

FEATURES

HIGH OUTPUT (PREMIUM BIN) 11W LEDS ULTRA-REFLECTIVE OPTICS DELIVER INCREDIBLE RANGE AND SPREAD OF LIGHT


DYNAMIC DRIVE MODULATION

DESIGNED AND BUILT IN THE UK

E-COAT PROVIDES MAXIMUM CORROSION RESISTANCE

TECHNICAL SPECS VOLTAGE RANGE 10-32V 10-32V 10-32V RAW LUMENS 16,544 24,816 28,952 BEAM PATTERN DRIVE DRIVE DRIVE BEAM DISTANCE (0.25LX) 1,111M 1,361M 1,470M NO. HIGH POWER LEDS 16 24 28 POWER CONSUMPTION 192W 262W 278W CURRENT DRAW (AT 14.4V) 13.4A 18.2A 19.3A LED LIFE (HOURS) 50.000* 50.0003 50,000* WEIGHT 2 142G 3 590G 3 084G

*LED manufacturers specification










| DIMENSIONS | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) |
|------------|--------|--------|--------|--------|--------|
| T16 | 684 | 68 | 64 | 94 | 70-83 |
| T24 | 1,004 | 68 | 64 | 94 | 70-83 |
| T28 | 1,164 | 68 | 64 | 94 | 70-83 |

T EVOLUTION RANGE ISOLUX PERFORMANCE

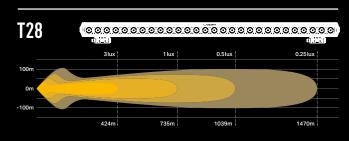

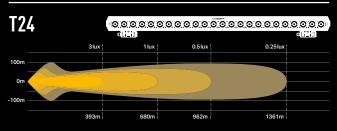

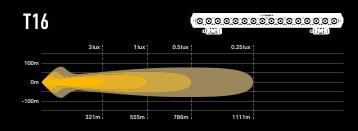

T EVOLUTION LIGHT OUTPUT














BUILT AND DESIGNED IN THE UK, THE UTILITY SERIES OF **WORK LIGHTS EMBODY THE PINNACLE OF INNOVATION AND** PERFORMANCE, UTILISING THE LATEST HIGH-DENSITY LED TECHNOLOGY AND CUTTING-EDGE PRODUCT DESIGN. THE UTILITY SERIES IS THE ULTIMATE SOLUTION FOR ALL YOUR WORK LIGHTING NEEDS.


With options ranging from 25W to 80W, the Utility Series sets a new standard for work lights, incorporating patent-pending design features that result in brighter light, improved functionality and unparalleled reliability. Get more out of your work light with the Utility Series - see more, work safer.

FEATURES

CLASS-LEADING PERFORMANCE SUPER-TOUGH CONSTRUCTION EMC PROTECTED - CISPR-25 (CLASS 3/5) **IP69K WATERPROOF** UNBREAKABLE POLYCARBONATE LENS PRE-WIRED CONNECTORS SUPPLIED

UTILITY SERIES ISOLUX PERFORMANCE





UTILITY-25 MAXX



50 lux line represents HSE guidelines for working outside at night while taking general tasks, such as labouring or moving g

| TECHNICAL SPECS | 25 | 25 MAXX | 45 | 80 |
|---------------------------|---------|---------|---------|---------|
| VOLTAGE RANGE | 10-32V | 10-32V | 10-32V | 10-32V |
| RAW LUMENS | 3,016 | 4,560 | 4,560 | 8,820 |
| BEAM PATTERN | FLOOD | FLOOD | FLOOD | FLOOD |
| BEAM ANGLE TO 10% OF PEAK | 78° | 78° | 80° | 80° |
| BEAM ANGLE TO 50% OF PEAK | 50° | 50° | 50° | 50° |
| NO. HIGH POWER LEDS | 4 | 4 | 4 | 4 |
| POWER CONSUMPTION | 25W | 45W | 45W | 80W |
| CURRENT DRAW (AT 14.4V) | 1.6A | 3.1A | 3.1A | 5.5A |
| LED LIFE (HOURS) | 50,000* | 50,000* | 50,000* | 50,000* |
| WEIGHT | 360G | 360G | 1,260G | 1,260G |

*LED manufacturers specification















| DIMENSION | S | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | F (mm) |
|-----------------|------------------|--------|--------|--------|--------|--------|--------|
| UTILITY-25 | | 56 | 79 | 86-100 | 24 | 79 | 33 |
| UTILITY-25 MAXX | | 56 | 79 | 86-100 | 24 | 79 | 33 |
| UTILITY-45 | (SLIMLINE MOUNT) | 85 | 108 | 132 | 40 | 108 | 117 |
| UTILITY-45 | (WIDE MOUNT) | 85 | 108 | 132 | 60 | 108 | 133.5 |
| UTILITY-80 | | 107 | 108 | 132 | 51 | 108 | 73 |

UTILITY SERIES LIGHT OUTPUT











VEHICLE INTEGRATION KITS

DEVELOPED TO ENHANCE THE HIGH-END STYLING OF 4X4S, PICK-UP TRUCKS, AND LIGHT COMMERCIAL VEHICLES, THE LOOK AND FINISH OF OUR VEHICLE INTEGRATION KITS EMBODY THE QUALITY THAT REPRESENTS THE LAZER BRAND. TRANSFORM YOUR VEHICLE'S APPEARANCE AND UPGRADE YOUR DRIVING EXPERIENCE WITH LAZER'S GRILLE INTEGRATION KITS!

Principally designed for our Triple-R 750 lights, grille integration kits offer an aesthetic appeal while enhancing your driving safety and comfort. Providing a sophisticated look and featuring exceptional lighting performance, making navigating through low-light or night time conditions a breeze. With quick and easy mounting, 20 minutes is all you will need to complete the job, allowing more time to enjoy the stunning result of your installation.

The streamlined design and manufacturing process guarantees that the newest vehicle models will have access to the latest grille integration kits, ensuring a seamless experience for you. Upgrade your ride with the best light solutions see more and drive safer with Lazer!









LAZER LAMPS PRODUCT RANGE

| LINEAR | STANDARD | ELITE |
|----------------------------|----------|-------|
| LINEAR-6 | • | • |
| LINEAR-12 | • | • |
| LINEAR-18 [†] | • | • |
| LINEAR-24 FLOOD | • | |
| LINEAR-24 | | • |
| LINEAR-36 | • | • |
| LINEAR-42 | • | • |
| LINEAR-48 | • | • |
| TRIPLE-R | STANDARD | ELITE |
| TRIPLE-R 750 | • | • |
| TRIPLE-R 850 | • | • |
| TRIPLE-R 1000 [†] | • | • |
| TRIPLE-R 1000 BEACON | • | |
| TRIPLE-R 1250 [†] | • | • |
| TRIPLE-R 1250 SMARTVIEW | • | |
| TRIPLE-R 16 | | • |
| TRIPLE-R 24 | | • |
| TRIPLE-R 28 | | • |
| SENTINEL | STANDARD | ELITE |
| SENTINEL 7" | • | • |
| SENTINEL 9" | • | • |
| ST/T EVOLUTION | | |
| ST2 | • | |
| ST4 | • | |
| ST6 | • | |
| ST8 | • | |
| ST12 | • | |
| T16 | • | |
| T24 | • | |
| T28 | • | |
| | | |
| UTILITY SERIES | | |
| UTILITY SERIES UTILITY-25 | _ | |
| | • | |
| UTILITY-25 | • | |

†Available with i-LBA.

MAY 2023-V8





LAZERLAMPS.COM

T +44 (0) 1992 677374 E sales@lazerlamps.com

Lazer Lamps Ltd, Units 1-2, Harlow Mill Business Centre Riverway, Harlow, Essex CM20 2FD, United Kingdom









